


# KDM-BCU60C

Stationary concrete mixing plant of  
the efficiency of 60 cubic meters/hour

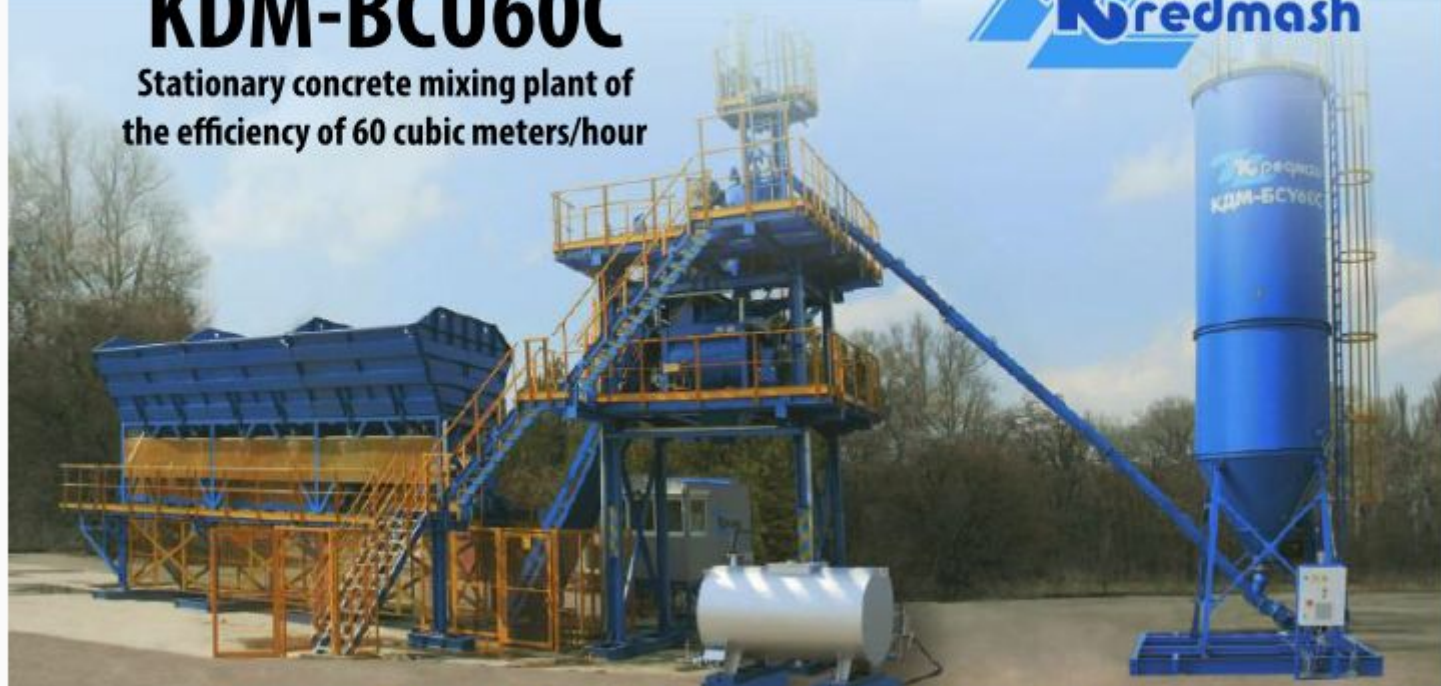

## BASIC PARAMETERS AND TECHNICAL CHARACTERISTICS

Technical characteristics	KDM-BCU60C
Efficiency, cubic meters/hour	60
Capacity of feeder bins, pcs. x cubic meters	3x20=60
Width of feeder bins load, m	3,5
Width of the conveyor belt (belt, suspension on 4 strain gauges) mm	800
Capacity of the cement bin, pcs. x cubic meter	1x32
Efficiency of the cement aggregate auger t/h	40
Two-shaft mixer of blade company Sicoma:	
- drive power, kW	37
- mixer capacity (according to the ready concrete), cub. m.	1,0
Capacity of the skip hoist, t	2
Cement metering device, volume, l	700
Water metering device, volume, l	500
Chemical admixtures metering device, volume, l	39
Efficiency of the compressor, l/min	1130
Overall dimensions (length x width x height), maximum, m	30,5 x 20,3 x 11,8
<b>Equipment supplied by a separate order (option)</b>	
Water pumping station:	
- efficiency of "rough" metering pump, cub. m/h(l/min)	42 (700)*
- efficiency of "exact" metering pump, cub. m/h(l/min)	3,6 (60)*
Chemical admixtures supply pump:	
- number of additional chemical admixtures, pcs.	2, 4, 6*
- efficiency of chemical admixtures pump, cub. m/h(l/min)	1.5 (25)*
Aspiration unit, filtering surface, square meters	6*
Set of spacing frames, kg	Имеется
Additional cement aggregate – bin capacity	(1x32)*
Efficiency of the additional cement aggregate auger t/h	40*

\* Specification subject to change without prior notice.

### Public Joint-Stock Company "Kremenchuk Plant of Road Machines"

4, Svobody avenue, Kremenchuk, Poltava region, Ukraine 39600  
Tel.: +38(0536)742289, 743224, 742013, 765035  
Tel./Fax: +38(0536) 765130, 765288, 501425

E-mail: [market@kredmash.com](mailto:market@kredmash.com)  
[www.kredmash.com](http://www.kredmash.com)